LAMP®

FLUSH SLIDING DOOR SYSTEM

Right-handed opening is shown in above picture
上圖所示為右開

Opening Motion
動作示意圖



No handle is needed on the door front for opening
門的外側無需使用拉手也可開門

Installation example
安裝例子

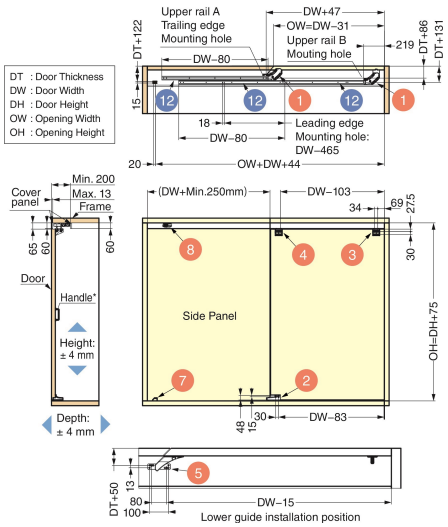

∗Drawings are for a Left to Right opening
(**HKS-2732C40/R** or **HKS-2732C70/R**)
本圖所示是從左到右開啟 (**HKS-2732C40/R** 或 **HKS-2732C70/R**)

∗The door cannot be opened from the inside without a handle (not included)
若門的內側無拉手(另購)，將無法在內側開閉

MonoFlat UNISON 巴士移門系統

'MonoFlat UNISON MFU1200' coplanar sliding door system with 2-way damper allows a single wooden door lying flush with adjacent walls when closed and moving in and sliding to the side when opened

'MonoFlat UNISON MFU1200' 單扇木質平移門五金配件連雙向緩衝套裝。當閉合時，門會與相鄰牆面齊平; 當開啟時，門向後移動然後向側方打開並隱藏於牆身後

Door width 門寬	: 800-1200 mm
Door height 門高	: Max. 27000 mm 不超過 2700 mm
Door thickness 門厚	: 30-40 mm
Adjustment 門片調整	: Depth 前後: ± 4 mm
	Height 上下: ± 4 mm



Model No. 型號	Door Weight 門承重	Type 類型
HKS-2732C40/L	20-40 kg	Left-handed opening 左開用
HKS-2732C40/R		Right-handed opening 右開用
HKS-2732C70/L	40-70 kg	Left-handed opening 左開用
HKS-2732C70/R		Right-handed opening 右開用

Each set (per door) comprising
每套(每扇門)包括配件：

1	2 pcs	Guiding track (top), aluminium alloy 上導軌，鋁合金	
2	1 pc	Guiding track (bottom), aluminium alloy 下導軌，鋁合金	
3	1 pc	Bracket (leading edge), steel 上底座(門前端用)，鋼	
4	1 pc	Bracket (trailing edge), steel 上底座(門後端用)，鋼	
5	1 pc	Bottom guide, steel/POM 底部導向座，鋼/聚縮醛	
6	1 pc	Connecting plate, steel 連接片，鋼	
7	1 pc	Door stopper (floor), zinc alloy/elastomer 門擋，鋅合金/橡膠	
8	1 pc	Bumper block, steel/elastomer 緩衝塊，鋅合金/橡膠	
9	2 pcs	Trigger, steel 解發器，鋼	
10	1 pc	Jig, POM 夾具，聚縮醛	
11	1 set	Set of soft closer (leading edge), steel/POM & door roller (trailing edge), steel 緩閉阻尼器(門前端用)及滾輪(門後端用)，鋼/聚縮醛	
12	1 set	Rail set (Upper track 1120 mm x 2 pcs, upper track 850 mm x 1 pc & bottom track 1100 mm x 1 pc), aluminium alloy 軌道套裝，鋁合金	

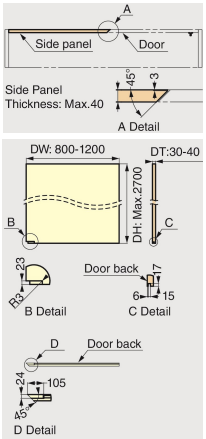

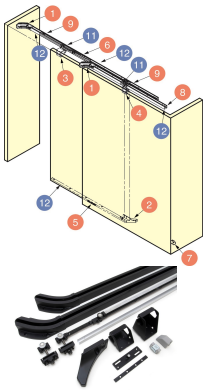

- The two-way damper allows doors to be both opened and closed softly
  雙向緩衝，開關順滑、緩慢安靜
- Clear appearance - no bottom rail or floor groove is required
  免用下軌或地板凹槽，外觀簡潔
- No handle is necessary on the door front for opening
  門的外側無需使用拉手也可開門